

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 096 770 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
02.05.2001 Bulletin 2001/18

(51) Int Cl.7: **H04M 7/00**

(21) Application number: 00309500.7

(22) Date of filing: 27.10.2000

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Bauer, Eric Jonathan**  
Freehold, NJ 07728 (US)  
• **Lam, Yuk-Ming Peter**  
Colts Neck, NJ 07722 (US)  
• **Huan, Fang-Fe S.**  
Marlboro, NJ 07746 (US)

(30) Priority: 28.10.1999 US 429389

(71) Applicant: **Avaya Technology Corp.**  
Miami Lakes, Florida 33014 (US)


(74) Representative: **Williams, David John et al**  
Page White & Farrer,  
54 Doughty Street  
London WC1N 2LS (GB)

(54) **Method and apparatus for suppression of packets during silence periods in a packet telephony system**

(57) A method and apparatus are disclosed for notifying a far-end calling party when a near-end calling party utilizes a hold or mute feature. The present invention reduces bandwidth utilization by suppressing the transmission of packets during periods of extended silence. Each packet telephony device includes a packet suppression system that monitors local terminal activity and notifies the far-end party that the near-end device

is discarding the "listen" stream. In addition, the disclosed packet suppression system monitors the incoming packets and processes such notifications from the far-end party that the far-end device is discarding the "listen" stream. In response, the packet suppression system can suppress the transmission of further packets and optionally activate a music-on-hold feature for the held party.

**FIG. 1**

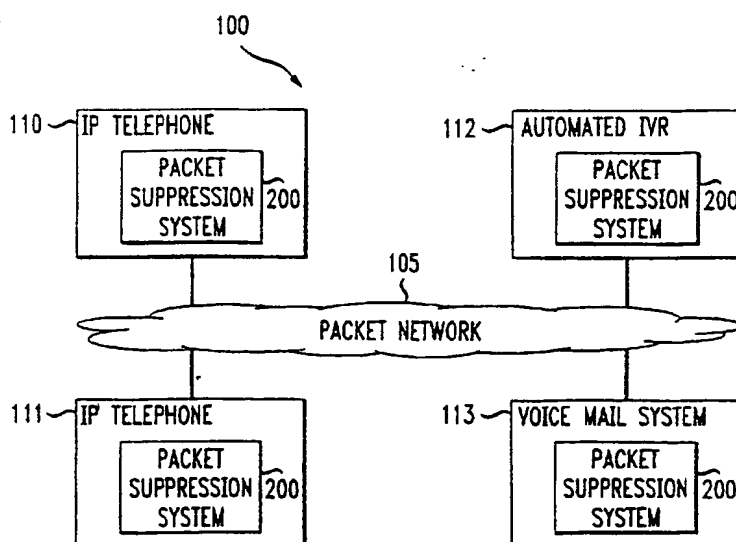

EP 1 096 770 A2

## Description

### Field Of The Invention

[0001] The present invention relates generally to packet telephony systems, and more particularly, to methods and apparatus for minimizing the bandwidth utilization in such packet telephony systems.

### Background Of The Invention

[0002] Communication networks are used to transfer information, such as data, voice, text or video information, among communication devices, such as packet telephones, computer terminals, multimedia workstations, and videophones, connected to the networks. A network typically comprises nodes connected to each other, and to communication devices, by various links. Each link is characterized by a bandwidth or link capacity.

[0003] Within a corporate environment, telephone service has typically been provided by a private branch exchange (PBX) switch. Generally, a private branch exchange (PBX) switch is an on-site facility, that is typically owned or leased by a company or another entity. The private branch exchange (PBX) interconnects the telephones within the facility and provides access to the Public Switched Telephone Network (PSTN). The centralized PBX controls all aspects of a telephone connection. For example, if a given calling party is placed on hold, the PBX may respond by transmitting a music source to the calling party for a music-on-hold feature. In any event, the bandwidth that is allocated to a given call (typically 64-Kbps in each direction) is maintained for the entire length of the call, even during periods of extended silence, such as when a call is placed on hold, or when one caller utilizes a mute feature.

[0004] Information sent from a communication device to a network may be of any form, but is often formatted into fixed-length packets or cells. Packet-switching network architectures are widely used, for example, in popular local-area network (LAN) protocols, such as Ethernet and asynchronous transfer mode (ATM) protocols. In a packet-switched network, data transmissions are typically divided into blocks of data, called packets, for transmission through the network. For a packet to get to its proper destination, the packet must traverse through one or more network switches, routers or intermediate systems. Typically, a packet includes a header, containing source and destination address information, as well as a payload (the actual application data). Increasingly, such packet telephony systems are being utilized in corporate environments. Unlike a PBX environment, the packet data network used by the packet telephony system is typically shared with other network applications, such as web browsers, electronic mail, file and print servers. To avoid disrupting and degrading other applications that operate on the shared network, it is important to minimize network usage when possible.

[0005] A need therefore exists for a mechanism for suppressing the transmission of packets during periods of extended silence, for example, when a call is placed on hold, or when one calling party utilizes the traditional telephony "audio mute" feature. A further need exists for a method and apparatus that generates music for a music-on-hold feature locally at the terminal of the party that is placed on hold. Yet another need exists for a method and apparatus that automatically suppresses the transmission of packets that will not be processed by the receiver, such as an automated interactive voice response unit (IVR) or a voice mail system before recording commences. Another need exists for a method and apparatus that notifies a calling party when another calling party utilizes a hold or mute feature.

### Summary Of The Invention

[0006] Generally, a method and apparatus are disclosed for notifying a far-end calling endpoint when a near-end calling party utilizes a hold or mute feature. The present invention reduces bandwidth utilization by suppressing the transmission of packets during periods of extended silence. Periods of silence are experienced, for example, when a call is placed on hold, or when packets will otherwise not be processed by the receiver, such as an automated interactive voice response unit (IVR) or a voice mail system before recording commences. If a near-end party activates the "hold" feature, then the near-end party is both ignoring anything sent by the far-end device and is not sending any meaningful media to the far-end device.

[0007] According to one aspect of the invention, each device in a packet telephony system includes a packet suppression system that monitors local user or application activity (such as activating the "hold" feature) and notifies the far-end party that the near-end device is discarding the "listen" stream. In addition, the packet suppression system of the present invention monitors the incoming packets and processes such notifications from the far-end party that the far-end device is discarding the "listen" stream. In response, the packet suppression system can suppress the transmission of further packets and optionally activate a music-on-hold feature for the held party. In this manner, the bandwidth consumption and resource utilization at both the near and far-end devices are minimized by suppressing the transmission of further packets until the far-end device indicates that it is again utilizing the "listen" stream. The near-end device can implement a music-on-hold feature, for example, by switching the input stream for the speaker/handset from the silent "listen" stream to an appropriate audio source.

[0008] A more complete understanding of the present invention, as well as further features and advantages of the present invention, will be obtained by reference to the following detailed description and drawings.

## Brief Description Of The Drawings

[0009]

FIG. 1 illustrates a packet telephony system in which the present invention can operate;

FIG. 2 is a schematic block diagram illustrating the packet suppression system of FIG. 1, in accordance with the present invention;

FIG. 3 illustrates a sample table from the music source database of FIG. 2;

FIG. 4 is a flow chart describing an exemplary packet suppression initiation process implemented by the packet suppression system of FIG. 2; and

FIG. 5 is a flow chart describing an exemplary packet suppression reaction process implemented by the packet suppression system of FIG. 2.

## Detailed Description

[0010] FIG. 1 illustrates a packet telephony system 100. The packet telephony system 100 shown in FIG. 1 includes a packet network 105 that connects a number of devices, such as Internet protocol (IP) telephones 110, 111, an automated interactive voice response unit (IVR) 112 and a voice mail system 113.

[0011] Each end-device 110-113 is a source of a media stream (a "talk" half-circuit) and a sink for a media stream (the "listen" half-circuit). Normally, the end-device is both playing the "listen" stream and sending a "talk" stream to the far-end device, and the far-end device is doing the same thing for the other far-end user. There are, however, several circumstances that lead an end-device to discard a "listen" stream or send silence on a "talk" stream or both. A "listen" stream will be discarded, for example, by an automated attendant, such as an automated interactive voice response unit (IVR) 112 that merely responds to dual-tone multi-frequency (DTMF) commands or a voice mail system 113 during playback of the outgoing voice message before recording commences. Likewise, if a device activates a hold feature, the holding party will discard the "listen" stream and send silence on the "talk" stream.

[0012] According to one feature of the present invention, each device in the packet telephony system 100 includes a packet suppression system 200, discussed further below in conjunction with FIG. 2, that monitors local terminal activity and notifies the far-end party that the near-end device is discarding the "listen" stream. In this manner, bandwidth consumption and resource utilization are minimized at both the near and far-end devices by suppressing the transmission of further packets until the near-end device is notified that the far-end device is again utilizing the "listen" stream.

[0013] As previously indicated, if the near-end device activates the "hold" feature, then the near-end device is both ignoring anything sent by the far-end device and is not sending any meaningful media to the far-end device. By notifying the far-end device that the near-end device is both discarding the "listen" stream and sending silence on the "talk" stream, then the present invention allows the far-end device to implement music-on-hold or some other advanced user experience for the "held" user at the far-end device. The far-end device can implement music-on-hold, for example, by switching the input stream for the speaker/handset from the silent "listen" stream to an appropriate audio source.

[0014] FIG. 2 is a block diagram showing the architecture of an illustrative packet suppression system 200. It is noted that the packet suppression system 200 shown in FIG. 2 has been generalized for use by all the devices 110-113 in FIG. 1 to illustrate the principles of the present invention. The packet suppression system 200 may be tailored for a specific device 110-113 and incorporate only a subset of the features discussed herein, as would be apparent to a person of ordinary skill in the art. The packet suppression system 200 includes a processor 210 and related memory, such as a data storage device 220. The processor 210 may be embodied as a single processor, or a number of processors operating in parallel. The data storage device 220 and/or a read only memory (ROM) are operable to store one or more instructions, which the processor 210 is operable to retrieve, interpret and execute.

[0015] As shown in FIG. 2, the data storage device 220 includes a music source database 300, shown in FIG. 3, that identifies an appropriate audio source for a music-on-hold feature for each class of telephone call, time-of-day, and/or other selection criteria. In addition, the data storage device 220 includes a packet suppression initiation process 400, shown in FIG. 4, that monitors local terminal activity and notifies the far-end party that the near-end device is discarding the "listen" stream. In addition, the data storage device 220 includes a packet suppression reaction process 500, shown in FIG. 5, that receives notifications from the far-end party that the far-end device is discarding the "listen" stream and activates music-on-hold or another appropriate feature.

[0016] The communications port 230 connects the packet suppression system 200 to the packet telephony environment 100, thereby linking the packet suppression system 200 to each connected node or party.

[0017] FIG. 3 illustrates an exemplary music source database 300 that identifies an appropriate audio source for a music-on-hold feature for each class of user, to implement a set of rules for a corporate user. The exemplary music source database 300 maintains a plurality of records, such as records 305 and 310, each associated with a different user type. For each user type listed in field 320, the music source database 300 identifies an appropriate audio source for a music-on-hold

feature in field 330.

**[0018]** As previously indicated, the far-end device can implement music-on-hold, for example, by switching the input stream for the speaker/handset from the silent "listen" stream to an appropriate audio source identified in the music source database 300. For example, the audio source for the music-on-hold feature may be an Internet Radio (multicast) channel identified by a uniform resource locator (URL). The URL for the audio source could either be configured for the far-end device by the network management system, using, for example, some simple business rules. For example, as shown in FIG. 3, the business rules can specify that National Public Radio (NPR) should be utilized as the audio source for the music-on-hold feature of all internal users, while recorded company advertisements should be utilized as the audio source for the music-on-hold feature of all external users, such as potential customers.

**[0019]** In addition, since the present invention permits the music-on-hold feature to be controlled by the device of the held party, rather than the holding party, advanced music-on-hold schemes can be implemented. For example, each user can specify a set of music "presets," in a similar manner to an automobile radio, with each numeric key on the telephone device's keypad corresponding to a different preprogrammed music source. Thus, after being placed on hold, the packet suppression system 200 can automatically initiate the music-on-hold feature with the last music channel that was played until the held party presses a numeric key for a new desired music source. This mechanism can be extended to support background music so the system plays music from the speaker even when there is no active call.

**[0020]** FIG. 4 is a flow chart describing the packet suppression initiation process 400 that monitors the local terminal activity and notifies the far-end party when the near-end device is discarding the "listen" stream. The packet suppression initiation process 400 continuously monitors the local activity on the telephone, such as telephone 110, and performs a test during step 410 to determine if the hold button has been pressed by the user. If it is determined during step 410 that the hold button has been pressed by the user then the packet suppression system 200 will transmit a message to the other party to the call during step 420 indicating the on-hold status. It is noted that the reaction of the held party to the on-hold message is discussed below in conjunction with FIG. 5.

**[0021]** In the case of an automated attendant, such as an automated interactive voice response unit (IVR) 112 or a voice mail system 113, the packet suppression initiation process 400 also continuously performs a test during step 430 to determine if the automated attendant is discarding the listen stream, for example, when an automated interactive voice response unit (IVR) 112 merely responds to dual-tone multi-frequency (DTMF) commands or a voice mail system 113 during playback of the outgoing voice message before recording com-

mences. If it is determined during step 430 that the automated attendant is discarding the listen stream, then the packet suppression system 200 will transmit a message to the other party to the call during step 420 initiating a remote mute. Thereafter, program control returns to step 410 to continue monitoring local activity.

**[0022]** FIG. 5 is a flow chart describing the packet suppression reaction process 500 that receives notifications from the far-end party that the far-end device is discarding the "listen" stream and activates music-on-hold or another appropriate feature. As shown in FIG. 5, the packet suppression reaction process 500 continuously monitors the incoming packets and performs a test during step 510 to determine if an on-hold message has been received from the other party. If it is determined during step 510 that an on-hold message has been received, then the packet suppression reaction process 500 will activate the music-on-hold feature during step 520 using an appropriate music source, for example, identified in the music source database 300.

**[0023]** In addition, the packet suppression reaction process 500 continuously monitors the incoming packets and performs a test during step 530 to determine if a hold release message has been received. If it is determined during step 530 that a hold release message has been received, then the packet suppression reaction process 500 will deactivate the music-on-hold feature during step 540 (if activated) and optionally notify the user, for example, by issuing a predefined tone. While a hold-activation message is required to be sent from the holding-party to the held-party, the hold-release message can be signaled implicitly by non-silence packets being sent from the holding-party.

**[0024]** In addition, the packet suppression reaction process 500 continuously monitors the incoming packets and performs a test during step 550 to determine if a remote mute message has been received. If it is determined during step 550 that a remote mute has been received, then the packet suppression reaction process 500 will suppress packets on talk stream during step 560.

**[0025]** To provide a superior user experience, it is important that the information that the talk or listen streams are being discarded or consumed be synchronized with the media itself. To assure the best possible synchronization, this information can be passed along in the Real-Time Protocol (RTP) media stream as control packets. It is noted that the Dual-Tone Multi-frequency (DTMF) signaling should be transmitted, even when one end has indicated that it is not listening to the media stream, as the DTMF signaling might be important to the application.

**[0026]** It is to be understood that the embodiments and variations shown and described herein are merely illustrative of the principles of this invention and that various modifications may be implemented by those skilled in the art without departing from the scope and spirit of the invention. For example, the music-on-hold feature

can be controlled by the near-end device who puts the far-end device on hold. The hold-initiating party may want to specify which periodic messages to play during music-on-hold for the held party. This is accomplished by having the hold-initiating device server send a recommended music source to be played during hold to the held-party's device server. This recommended music source can contain, for example, advertisements, spoken information, or music. The URL for the recommended music source can be exchanged, for example, in the on-hold message packet that the hold-initiating device sends to the held-party, or it could be exchanged as part of the call-setup process.

#### Claims

1. A method for reducing resource utilization between a near-end device and a far-end device in a packet telephony system, comprising the steps of:

monitoring said near-end device to detect if said near-end device is discarding at least one communication stream between said near-end device and said far-end device; and  
notifying said far-end device that said near-end device is discarding at least one communication stream.

2. The method of claim 1, wherein said near-end device is an automated interactive voice response unit (IVR) that responds to dual-tone multi-frequency (DTMF) commands.

3. The method of claim 1, wherein said near-end device is a voice mail system and said at least one communication stream is discarded during playback of the outgoing voice message before recording commences.

4. A system for reducing resource utilization between a near-end device and a far-end device in a packet telephony system, comprising:

a memory for storing computer-readable code; and  
a processor operatively coupled to said memory, said processor configured to:  
monitor said near-end device to detect if said near-end device is discarding at least one communication stream between said near-end device and said far-end device; and  
notify said far-end device that said near end device is discarding at least one communication stream.

5. The system of claim 4 or the method of claim 1, wherein said far-end device suppresses transmis-

sion of information until notified by the near-end device.

6. The system of claim 4 or the method of claim 1, wherein said far-end device discards said communication stream when said near-end device puts a call on hold.

7. The system of claim 4 or the method of claim 1, wherein said near-end device is an automated interactive voice response unit (IVR) that responds to dual-tone multi-frequency (DTMF) commands.

8. The system of claim 4, wherein said near-end device is an automated interactive voice response unit (IVR) that responds to dual-tone multi-frequency (DTMF) commands.

9. The system of claim 8 or the method of claim 2, wherein said notification is a remote mute command.

10. The system of claim 4, further comprising the step of notifying said far-end device that said near-end device is again utilizing said communication stream.

11. A method for reducing resource utilization between a near-end device and a far-end device in a packet telephony system, comprising the steps of:

monitoring incoming packets for a notification that said far-end device is discarding at least one communication stream; and  
suppressing the transmission of further packets on said communication stream.

12. The method of claim 11, further comprising the step of activating a music-on-hold feature for said near-end device.

13. A method for reducing resource utilization between a near-end device and a far-end device in a packet telephony system, comprising the steps of:

monitoring incoming packets for a notification that said far-end device is discarding at least one communication stream; and  
activating a music-on-hold feature for said near-end device.

14. A system for reducing resource utilization between a near-end device and a far-end device in a packet telephony system, comprising:

a memory for storing computer-readable code; and  
a processor operatively coupled to said mem-

ory, said processor configured to:  
 monitor incoming packets for a notification that  
 said far-end device is discarding at least one  
 communication stream; and  
 suppress the transmission of further packets on  
 said communication stream.

15. The method of claim 11 or the system of claim 14,  
 further comprising the step of monitoring incoming  
 packets for a notification that said far-end device is  
 again utilizing said communication stream. 10
16. The method or system of claim 15, further compris-  
 ing the step of reactivating said communication  
 stream following a notification that said far-end de-  
 vice is again utilizing said communication stream. 15
17. The method of claim 11 or the system of claim 14,  
 wherein said near-end device discards said com-  
 munication stream when said far-end device puts a  
 call on hold. 20
18. The method of claim 11 or the system of claim 14,  
 wherein said far-end device is an automated inter-  
 active voice response unit (IVR) that responds to  
 dual-tone multi-frequency (DTMF) commands. 25
19. The method of claim 11 or the system of claim 14,  
 wherein said far-end device is a voice mail system  
 and said at least one communication stream is dis-  
 carded during playback of the outgoing voice mes-  
 sage before recording commences. 30
20. The method of claim 11 or the system of claim 14,  
 wherein said notification is a remote mute com-  
 mand. 35
21. A system for reducing resource utilization between  
 a near-end device and a far-end device in a packet  
 telephony system, comprising: 40
  - a memory for storing computer-readable code;  
 and
  - a processor operatively coupled to said mem-  
 ory, said processor configured to: 45
    - monitor incoming packets for a notification that  
 said far-end device is discarding at least one  
 communication stream; and
    - activate a music-on-hold feature for said near-  
 end device. 50
22. The system of claim 21 or the method of claim 13,  
 wherein said music-on-hold feature utilizes a local  
 music source. 55
23. The system of claim 21 or the method of claim 12  
 or claim 13, wherein said music-on-hold feature uti-  
 lizes a predefined music source for each user class.

24. The system of claim 21 or the method of claim 12  
 or claim 13, wherein said music-on-hold feature uti-  
 lizes a predefined music source for a certain time  
 interval.

25. The system of claim 21 or the method of claim 12  
 or claim 13, wherein said music-on-hold feature uti-  
 lizes a predefined music source for a certain type  
 of call.

FIG. 1

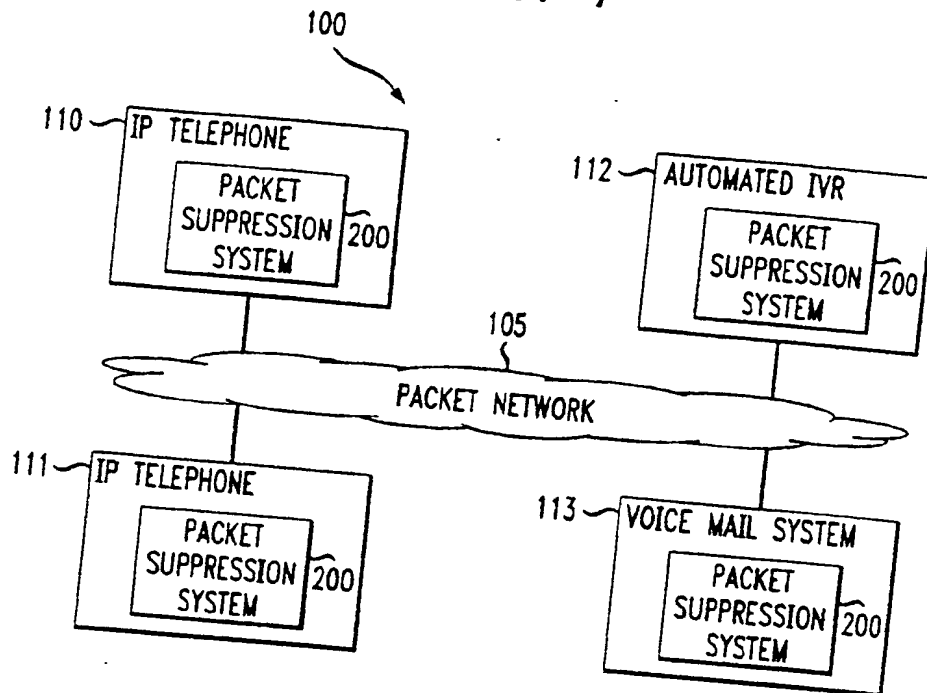


FIG. 2

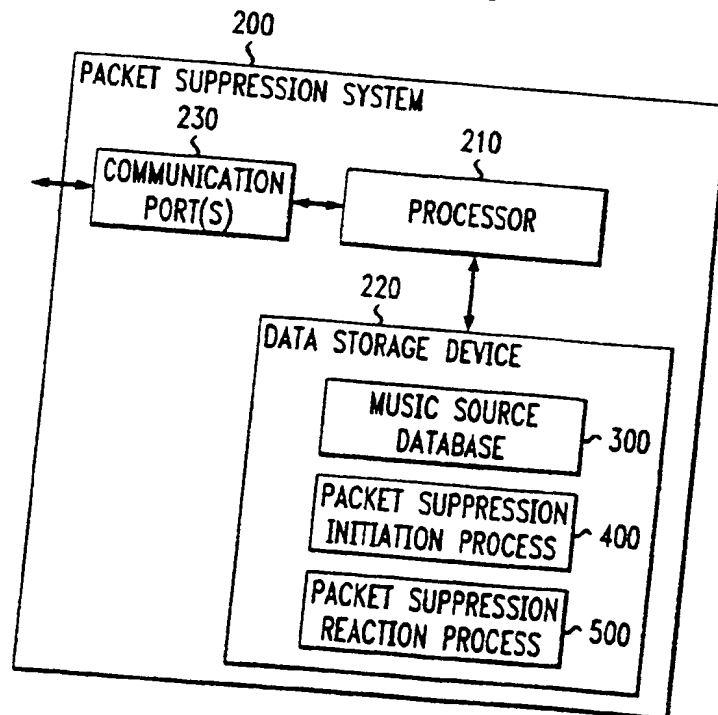


FIG. 3

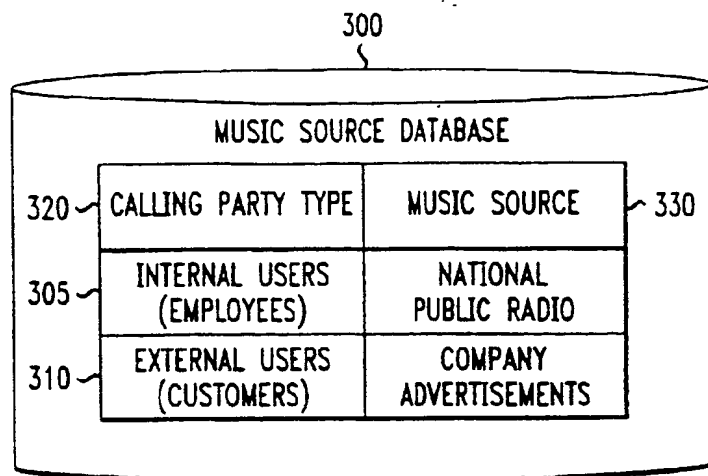


FIG. 4



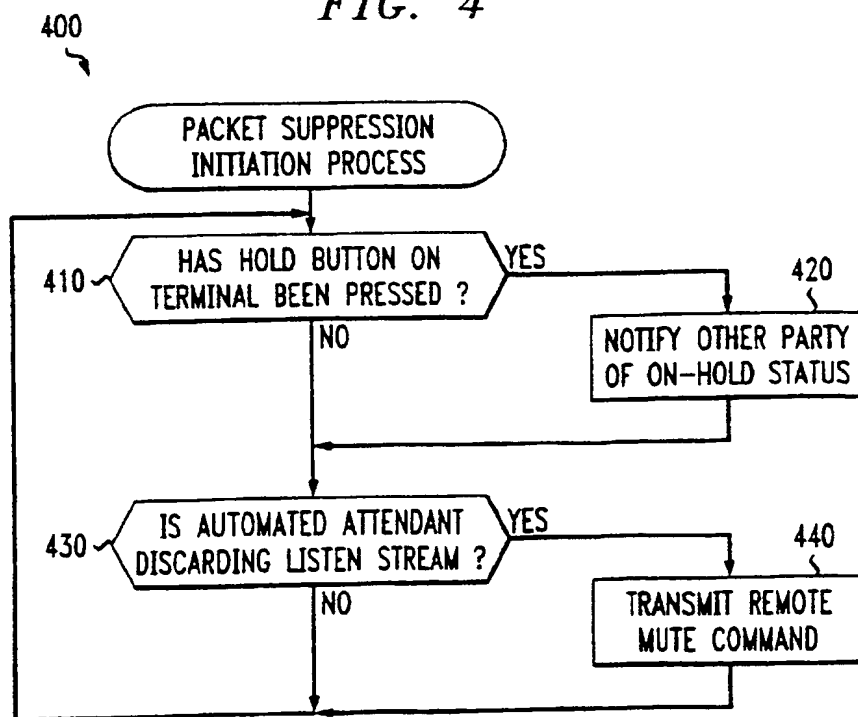




FIG. 5

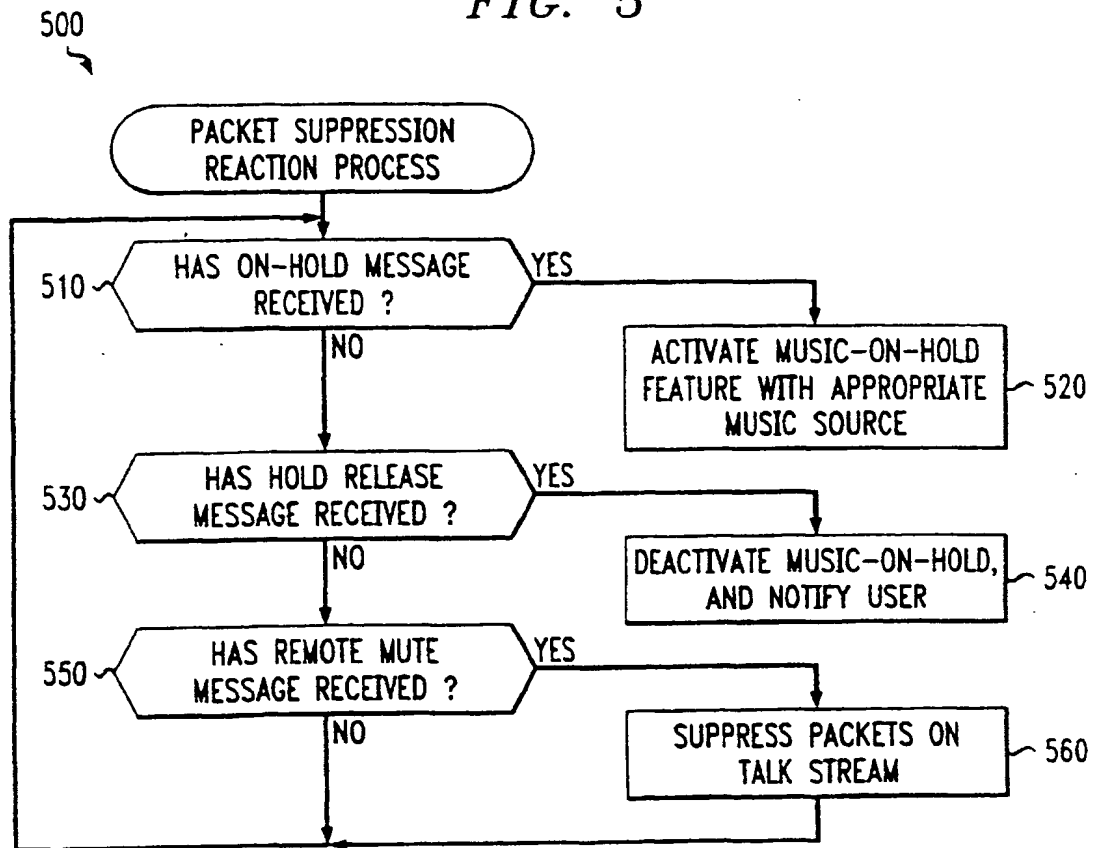



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 096 770 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
17.11.2004 Bulletin 2004/47

(51) Int Cl.7: H04M 7/00

(43) Date of publication A2:  
02.05.2001 Bulletin 2001/18

(21) Application number: 00309500.7

(22) Date of filing: 27.10.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Bauer, Eric Jonathan  
Freehold, NJ 07728 (US)  
• Lam, Yuk-Ming Peter  
Colts Neck, NJ 07722 (US)  
• Huan, Fang-Fe S.  
Marlboro, NJ 07746 (US)

(30) Priority: 28.10.1999 US 429389

(71) Applicant: Avaya Technology Corp.  
Miami Lakes, Florida 33014 (US)


(74) Representative: Williams, David John et al  
Page White & Farrer,  
54 Doughty Street  
London WC1N 2LS (GB)

(54) **Method and apparatus for suppression of packets during silence periods in a packet telephony system**

(57) A method and apparatus are disclosed for notifying a far-end calling party when a near-end calling party utilizes a hold or mute feature. The present invention reduces bandwidth utilization by suppressing the transmission of packets during periods of extended silence. Each packet telephony device includes a packet suppression system that monitors local terminal activity and notifies the far-end party that the near-end device

is discarding the "listen" stream. In addition, the disclosed packet suppression system monitors the incoming packets and processes such notifications from the far-end party that the far-end device is discarding the "listen" stream. In response, the packet suppression system can suppress the transmission of further packets and optionally activate a music-on-hold feature for the held party.

FIG. 1

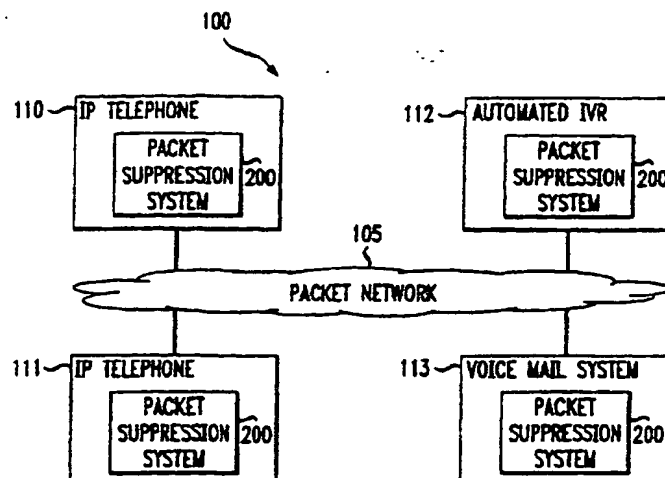

EP 1 096 770 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 9500

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 744 852 A (AT & T CORP) 27 November 1996 (1996-11-27) * abstract; figures figure,1,figure,12 * * column 2, line 25 - line 48 * * column 3, line 44 - column 4, line 15 * * column 7, line 43 - line 45 * * column 12, line 53 - line 58 *	1,4	H04M7/00
X	SCHULZRINNE H ET AL: "Signaling for Internet telephony" NETWORK PROTOCOLS, 1998. PROCEEDINGS. SIXTH INTERNATIONAL CONFERENCE ON AUSTIN, TX, USA 13-16 OCT. 1998, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 13 October 1998 (1998-10-13), pages 298-307, XP010309377 ISBN: 0-8186-8988-9	1,4-6, 9-17, 20-25	
Y	* page 298 - page 306; figures 1,2 *	2,3,7,8, 17-19	
X	DALGIC I ET AL: "COMPARISON OF H.323 AND SIP FOR IP TELEPHONY SIGNALING" PROCEEDINGS OF THE SPIE, SPIE, BELLINGHAM, VA, US, vol. 3845, September 1999 (1999-09), pages 106-122, XP000949839 ISSN: 0277-786X * pages 108-112 * * figure 1 *	1,4-6, 9-17, 20-25	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04M H04L
Y	WO 96/24215 A (RADISH COMMUNICATIONS SYSTEMS) 8 August 1996 (1996-08-08) * abstract; claims 1-4,16; figures 1,2 *	2,3,7,8, 17-19	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 28 September 2004	Examiner Ohanovici, Z-C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (3-82) (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 9500

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-09-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0744852	A	27-11-1996	US 5701295 A	23-12-1997
			AU 5239496 A	05-12-1996
			CA 2173301 A1	27-11-1996
			CN 1137718 A ,B	11-12-1996
			EP 0744852 A2	27-11-1996
			JP 9008921 A	10-01-1997
			SG 68583 A1	16-11-1999
WO 9624215	A	08-08-1996	AU 4768896 A	21-08-1996
			WO 9624215 A1	08-08-1996
			US 5583922 A	10-12-1996